

**1500
nit**

**OB Van 21"
Rack Monitors**

HDR

**21" Rack Mountable Monitor
Designed for OB Van**

OBM-R210 / OBM-R210Q

The OBM-R210 and OBM-R210Q are the 21.5" broadcast monitors specially designed to install in the OB Van. The OBM-R210 and OBM-R210Q have the narrow bezel size with control buttons on the rear side, and the case is made of the aluminum, which make these two monitors ideal for OB Van. The OBM-R210 and OBM-R210Q offer the professional performance, including accurate color reproduction through 3D LUT, HD HDR, Waveform, Vector Scope, IMD/UMD, and a full feature set.



OBM-R210

Outstanding Picture Quality

- 3G-SDI x 2 Input & Active Loopout
- HDMI / Analog / DVI Input
- 3D-LUT for Accurate Color Reproduction
- HD HDR Support
- Color Depth 1.064 Billion Colors
- Waveform & Vector Scope
- IMD / 16ch Audio Level Meter
- System Data Copy & Load
- Remote Control via GPI and Network
- Panel Resolution 1920 x 1080(21.5")



2019 1Q

OBM-R210Q

Quad Rack Monitor

- 4 x 3G-SDI Input & Active Loopout
- HDMI 2.0 Input
- Quad-screen Display
- 3D-LUT for Accurate Color Reproduction
- HD HDR Support
- Color Depth 1.064 Billion Colors
- Waveform & Vector Scope
- UMD / 16ch Audio Level Meter
- Remote Control via GPI and Network
- Panel Resolution 1920 x 1080(21.5")



POSTIUM KOREA Co., Ltd.
www.postium.com

21" Rack Mountable Monitor Designed for OB Van

OBM-R210 / OBM-R210Q

Specifications


ITEM		POM-R210	OBM-R210Q
Input	BNC (SDI)	2 x 3G/HD/SD-SDI-1/2	4 x 3G/HD/SD-SDI
	HDMI	1 x HDMI 1.3a	1 x HDMI 2.0
	BNC (YPbPr)	3 x Analog(YPbPr)	-
	BNC (CVBS)	1 x Composite	-
	DVI	1 x DVI-D	-
Output	BNC (SDI)	2 x 3G/HD/SD-SDI-1/2	4 x 3G/HD/SD-SDI
Input Signal Format	SMPTE ST 425-AB	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF 29.97sF/25sF/24sF/23.98sF) / 1080i (60/59.94/50)	
	SMPTE ST 274	1080p(30/29.97/25/24/23.98/24sF/23.98sF) 1080i (60/59.94/50)	
	SMPTE ST 296	720p(60/59.94/50)	
	SMPTE ST 260	1920 x 1035i(60/59.94)	
	SMPTE ST 2048	2048 x 1080p(24/23.98/24sF/23.98sF)	
	SMPTE ST 125	480i(59.94)	
	ITU-R BT.656	576i(50)	
	HDMI	1080p(60)	2160p(60)
	DVI-D	VESA/IBM Modes	
Audio In/Out	1 x Phone Jack In	Line In(Stereo)	
	1 x Phone Jack Out	H/P Out(Front, Stereo)	
	2 x Speaker Out	Stereo	
Display	Size	21" LCD	
	Resolution	1920 x 1080 (16 : 9)	
	Pixel Pitch	0.270mm	
	Color	True 16.7M Colors	
	Viewing Angle	178(H), 178(V)	
	Luminance of White	1500cd/m ²	
	Contrast	1000 : 1	
	Active Area (H x V)	476.064 (H)mm x 267.786 (V) mm	
General	1 x Ethernet	Control/Update, RJ-45 Input	
	1 x GPIO	GPI-7 Port, RJ-45P Jack	
	2 x Serial	RS-422 Jack, RJ-45P Input / Output	
	1 x USB	For Firmware Update, Color Calibration	
	Power Requirements	AC(100-230V,50/60Hz) / DC24V	
	Power Consumption	Max 40W	
	Operating Temperature	0 ~ 40°C(32°F~104°F)	
	Operating Humidity	20 ~ 80% RH	
	Weight	TBD	
	Dimensions	505 x 297 x 55 mm / 19.88 x 11.69 x 2.16 inch	
	Accessories	Power Cable / Rack Mount Kit	
	Option	VESA Mount / Wall Bracket	

* Specifications are subject to change without prior notice for the product quality improvement.

OBM-R210



OBM-R210Q

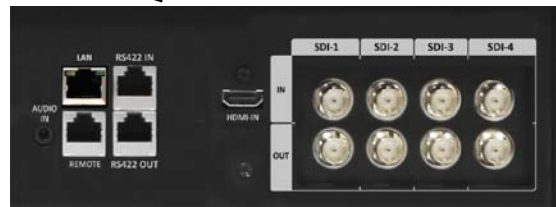

POSTIUM KOREA Co., Ltd.
www.postium.com
sales@postium.com